



PARTS LIST FOR
AIR COMPRESSORS
AM1-HE15-03QM

PHASE:	SINGLE
VOLTS :	120
MAXIMUM AMPS:	11
MAXIMUM PRESSURE:	150 PSI

This Parts Listing has been compiled for your benefit. You can be assured your air compressor was constructed and designed with quality and performance in mind. Each component has been rigorously tested to insure the highest level of acceptance.

The contents of this Parts Listing are based on the latest product information available at the time of publication. The manufacturer reserves the right to make changes in price, color, materials, equipment, specifications or models at any time without notice.

WARNING

THIS IS A PROFESSIONAL ELECTRIC AIR COMPRESSOR. CAUTION SHOULD BE OBSERVED WHEN USING OR REPAIRING THIS UNIT!
READ AND FOLLOW THE SAFETY WARNINGS LISTED BELOW BEFORE ATTEMPTING ANY REPAIRS ON THIS ELECTRIC AIR COMPRESSOR!

SAFETY WARNINGS

1. NEVER alter or modify the equipment. Be sure any accessory items and system components being used will withstand the pressure developed. Use only genuine manufacturer replacement parts for repair of your air compressor. Failure to do so can cause hazardous operating conditions and will VOID warranty.
2. Do not operate the unit without all protective covers in place. Know how to stop and bleed pressures quickly. Be thoroughly familiar with controls.
3. Before servicing the unit, turn unit off, relieve the pressure and allow the unit to cool down. Do not make repairs while the unit is running. Service in a clean, dry, flat area.
4. After testing the machine, DO NOT leave the pressurized unit unattended. Shut off the unit and release trapped pressure before leaving.


TABLE OF CONTENTS

SPECIFICATIONS.....	3
TANK ASSEMBLY.....	4

SPECIFICATIONS

MODEL NUMBER	AM1-HE15-03QM
Motor:	
Horsepower	1.5
Voltage	120
Amperage	11
Hz	60
Phase	Single
Compressor Pump:	Oil-Free
Pressure Switch Setting:	
Cut-out	150 PSI
Cut-in	120 PSI
Air Tank:	
Capacity	3 Gallons
Performance:	
CFM @ 40 PSI	5.0
CFM @ 90 PSI	4.0
Maximum Pressure	150 PSI
Pump-up Time: 0-120 PSI	50.03 seconds
Recovery Time: 120-150 PSI	10.9 seconds
Working Pressure Range	120-150 PSI
Weight:	
Net	51 lbs
Shipping	62 lbs
Dimensions:	
Shipping L x W x H	19.25" x 18.25" x 15.37"

TANK ASSEMBLY

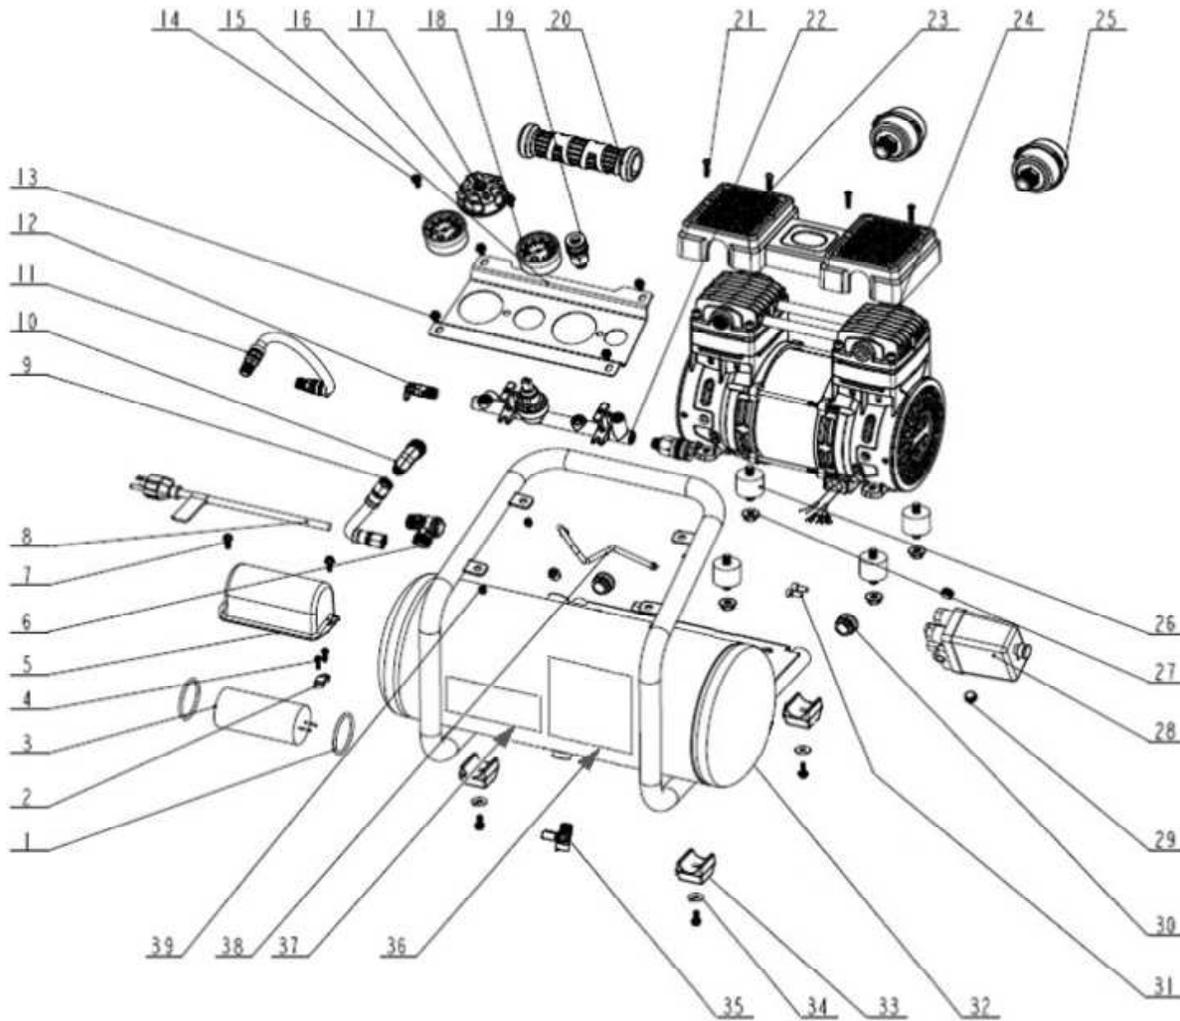

AM1-HE15-03QM 032620 JA			
TANK ASSEMBLY			
ITEM	DESCRIPTION	PART #	QTY
1	O-RING	25-0716	2
2	CORD CLAMP	32-1259	1
3	CAPACITOR	32-1257	1
4	SCREW	27-3268	2
5	CAPACITOR SHROUD	20-1594	1
6	CHECK VALVE	22-0522	1
7	SCREW	27-3269	6
8	POWER CORD	32-1256	1
9	TRANSFER TUBE	15-0389	1
10	ELBOW	23-0522	1
11	HOSE	15-0390	1
12	VALVE	22-0511	1
13	SCREW	27-8803	6
14	SCREW	27-8839	2
15	PANEL	20-1620	1
16	REGULATOR KNOB	7-0280	1
17	SCREW	27-8879	1
18	PRESSURE GAUGE	22-0523	2
19	COUPLER	17-0086	2
20	HANDGRIP	7-0278	1
21	SCREW	27-8838	4
22	REGULATOR	22-0517	1
23	PUMP COVER	62-0261	1
24	MOTOR/PUMP	3-0448	1
25	AIR FILTER	19-0299	2
26	ISOLATOR	14-0163	4
27	NUT	30-3023	4
28	PRESSURE SWITCH	22-0521	1
29	PLUG	23-0521	2
30	END CAP	39-0400	2
31	CRIMP CAP	32-1258	2
32	TANK	12-0278	1
33	ISOLATOR	14-0166	4
34	WASHER	28-0200	4
35	VALVE	22-0519	1
36	DECAL	34-3027	1
37	DECAL	N/A	1
38	TUBE	15-0391	1
39	NUT	30-6001	4

Manufactured by Mi-T-M
50 Mi-T-M Drive, Peosta IA 52068
563-556-7484/ Fax 563-556-1235