

# Recovery & Recycle System

**PWR Series** 



Making a positive impact on our environment for today and future generations.

# **PWR Series**

## Recovery & Recycle System

THE PORTABLE WATER RECOVERY SERIES CAPTURES, FILTERS AND RECYCLES WASH WATER FOR REUSE OR PROPER DISPOSAL ON AND OFF JOBSITES.



### **FEATURES**

- 1/3 HP transfer pump
- · Oil absorbing boom/stick
- Vacuum tank drain
- 3-stage vacuum motor
- Stainless-steel suction head
- · Cam lock fittings
- 50-foot vacuum hose
- 55-gallon tank capacity
- 20-foot water berm





| MODEL NUMBER | VACUUM MOTOR                    | TANK CAPACITY | FILTER PUMP                  | WATER BERM | DIMENSIONS (LxWxH) | SHIP WT. | NET WT. |
|--------------|---------------------------------|---------------|------------------------------|------------|--------------------|----------|---------|
| PWR-10-0ME1  | 3-stage, 1500W, 12.5A full load | 55-gallons    | 1/3 HP, 120V, 1Ø, 8.0A, 60Hz | 6in.x20ft. | 48x42x60in.        | 340 lb.  | 290 lb. |

#### ACCESSORIES:

| PART NUMBER | DESCRIPTION   |  |
|-------------|---|--|
| 19-0216     | 20-micron poly filter – 20-inch, pleated                                  |  |
| 19-0302     | 10-micron cartridge filter – 20-inch                                      |  |
| 21-0306     | Stainless-steel suction head  |  |
| 33-0520     | Water berm – 6-inch x 20-foot   |  |
| 33-0529     | Oil absorbing boom – Oil sock for inside of tank                          |  |
| 855-0057    | 50-foot x 1½-inch vacuum hose — Can have up to 100-foot of extension hose |  |

### OPTIONS:

| PART NUMBER | DESCRIPTION   |  |  |
|-------------|---|--|--|
| TX-0010     | Adjustable trailer coupler hitch, 2-inch — Replaces the standard 2-inch ball hitch with a 2-inch trailer hitch with pin-style fastener trailer coupler and hinged ball socket; for AW-9000-0010 trailer package |  |  |
| TX-0019     | Lunette ring hitch, 3-inch — Replaces the standard 2-inch ball hitch with a 3-inch integrated lunette ring for use with pintle hitches; for AW-9000-0010 trailer package  |  |  |
| WX-0106     | Wheel kit – Includes two flat-free tires, powder coated steel frame and handle  |  |  |
| WX-0109     | Dual filters – Uses 30-micron filter #19-0216 and 10-micron filter #19-0302. Includes one set of filters installed in housings and one set of replacement filters.  |  |  |
| WX-0129     | Dual filters for PWR-10-0ME1 trailer-mount package — Uses 30-micron filter #19-0216 and 10-micron filter #19-0302. Includes one set of filters installed in housings and one set of replacement filters.        |  |  |

### **PWR Series**

### Portable Water Recovery Trailer Packages

### PWR SERIES TRAILER PACKAGES INCLUDE:

- Portable water recovery trailer, AW-9000-0010
- PWR-10-0ME1 with WX-0129 option
- Hot water pressure washer Choose from HVS-3505-1H6G or HDS-3505-1H6G

#### Portable Water Recovery Trailer, AW-9000-0010

- 5-foot x 8½-foot dual-axle trailer
- 200-gallon water tank enclosed in powder coated steel frame
- Jack with pad
- · Rubber mounted sealed lights
- 50-foot inlet garden hose with hose reel
- 100-foot high pressure hose with hose reel
- Tank feed for pressure washer
- Option to directly feed water from inlet hose reel

### PWR-10-0ME1 with WX-0129 Option for Trailer

Includes all standard PWR Series features, as well as:

- 2 cartridge filters 20 and 10-micron; includes one set of replacement filters. Other sizes are available, consult dealer.
- Automatic discharge to outlet valve for reuse or discharge


### Hot Water Pressure Washer, HVS-3505-1H6G with HX-0252 Option for Trailer

- 3500 PSI @ 4.2 GPM
- GX630 Honda OHV gasoline engine
- Belt drive triplex piston clutch driven General pump
- Heavy-duty powder coated steel square tube skid frame
- · Powder coated steel coil wrap and control panel
- · Trailer tank feed
- 80-mesh inlet Y-strainer
- Generator wired for burner and PWR-10-0ME1 with dual filters option, WX-0129
- Consult dealer for additional options available for the HVS-3505-1H6G

### Hot Water Pressure Washer, HDS-3505-1H6G with HX-0253 Option for Trailer

- 3500 PSI @ 4.2 GPM
- GX630 Honda OHV gasoline engine
- Belt drive triplex piston clutch driven General pump
- Heavy-duty powder coated steel square tube skid frame
- Stainless-steel coil wrap and control panel
- Trailer tank feed
- 80-mesh inlet Y-strainer
- Generator wired for burner and PWR-10-0ME1 with dual filters option, WX-0129
- Consult dealer for additional options available for the HDS-3505-1H6G



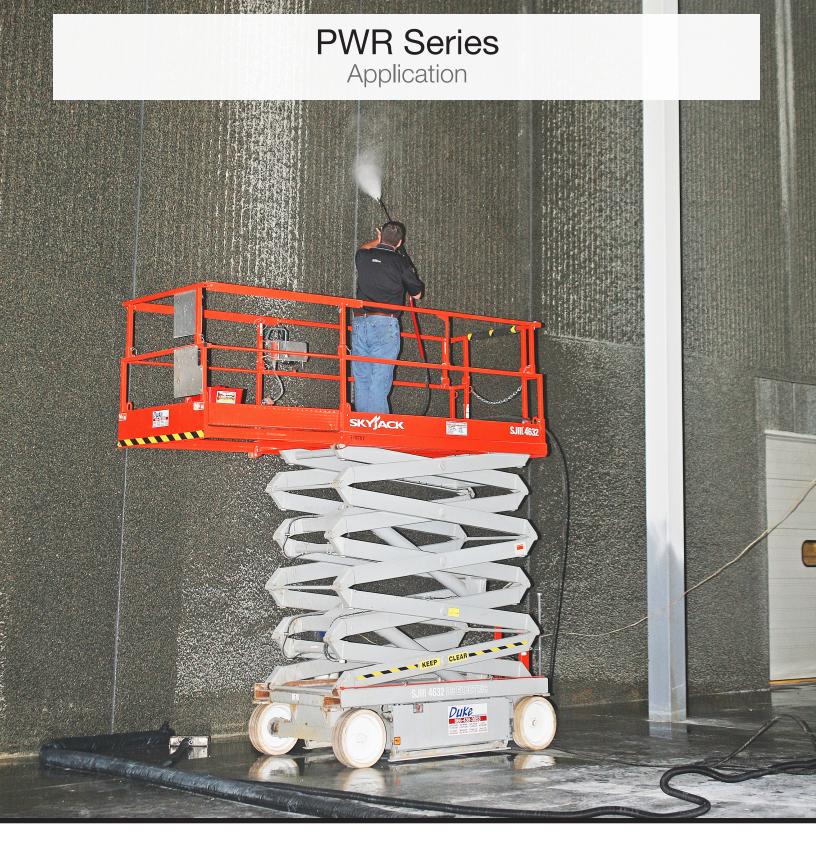



5500 Commerce Blvd., Suite A Rohnert Park, CA 94928 (707) 793-4800

www.ushydrotech.com | info@usHydroTech.com

