


Single Stage — Gasoline

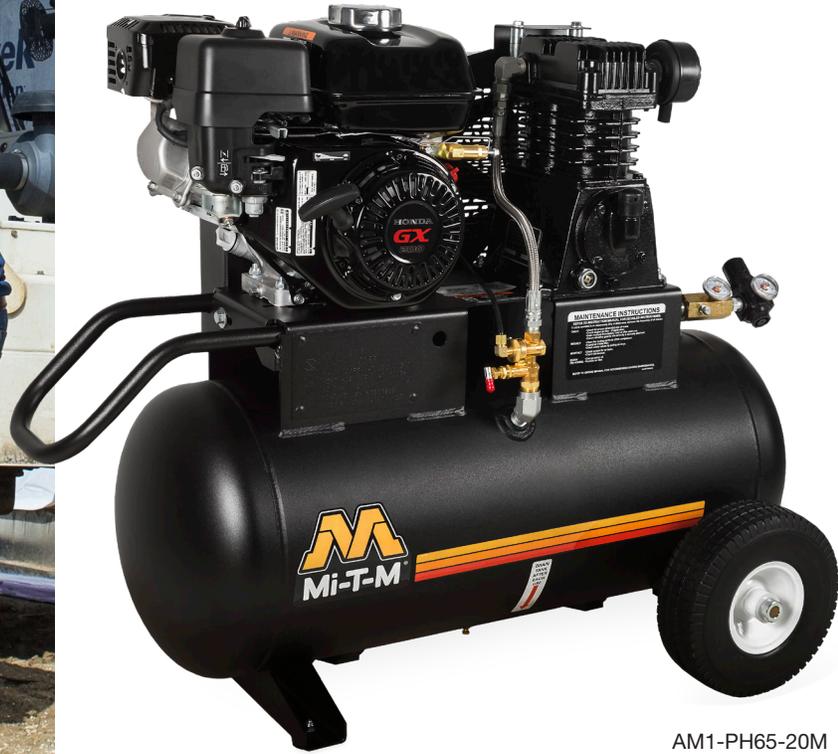

AM1-PH65-20M

The ideal tool for construction sites, this model features a powerful single stage compressor that produces a lot of air for the 20-gallon tank. Designed for maximum productivity and portability, it is a popular choice among contractors.

Compressor Pump:

Splash lubricated | Stainless-steel braided discharge hose | Large canister intake filter | Oil level sight indicator


Frame:

Powder coated ASME coded 20-gallon receiver tank | 3/16-inch base plate to reduce vibration | 16-gauge powder coated two-piece belt guard | 10-inch flat-free tires

Components:

Regulator and two gauges for tank and outlet pressure | Manual drain valves for proper maintenance | 12-inch fly wheel | Quality pilot valve unloader

MODEL NUMBER	CFM @ PSI	DISPLACEMENT/ENGINE	COMPRESSOR	TANK SIZE	ENGINE IDLE CONTROL	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
AM1-PH65-20M	13.9 @ 90	196cc Honda GX200 OHV	Single stage, cast iron	20-gallon	Pneumatic	37x23.5x33in.	272 lb.	212 lb.



20-Gallon

Air Compressors – Single Stage – Gasoline

Options:

<i>PART NUMBER</i>	<i>DESCRIPTION</i>	<i>FITS MODEL</i>
AX-0003	Manual drain/regulator/metal bowl - Drains moisture from air system	AM1-PH65-20M
AX-0027	Stationary kit - Converts the portable model to a stationary model, removes the wheels and handle, adds a stationary leg	AM1-PH65-20M

Accessories:

<i>PART NUMBER</i>	<i>DESCRIPTION</i>	<i>FITS MODEL</i>
7-0228A01	Rear lifting handle - Allows unit to be lifted from both ends	AM1-PH65-20M
70-0357	Engine oil drain extension - 14-inch flexible drain hose makes oil changes clean and easy	AM1-PH65-20M
AW-6000-1002	Equipment cover - Keeps your equipment clean, dry and looking like new	AM1-PH65-20M

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov.